

STAMFORD

S0L2-G1 Winding 06 / 706

S0L2-G1 - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
VITA01	Self-Excited / Aux winding
Voltage Regulation	± 0.5%
No Load Excitation Voltage (V)	12 V
Full Load Excitation Voltage (V)	48 V

STAMFORD

S0L2-G1 Winding 06 / 706

Electrical Data		
Insulation System	Class H	
Stator Winding	Double Layer Concentric	
Winding Pitch	Two Thirds	
Winding Leads	4	
Winding Number	06 / 706	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others	
Waveform Distortion	NO LOAD < 2.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	5.2	
60 Hz		
Telephone Interference	TIF<75	
Voltage Series/ Voltage Parallel	240/120	240/120
Power Factor	0.8	1.0
kVA Base Rating (Class H)	14.5	15.6
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	0.940	1.011
X'd Dir. Axis Transient	0.109	0.117
X''d Dir. Axis Subtransient	0.108	0.116
Xq Quad. Axis Reactance	0.834	0.897
X''q Quad. Axis Subtransient	0.139	0.150
XL Stator Leakage Reactance	0.075	0.081
X2 Negative Sequence Reactance	0.212	0.228
X0 Zero Sequence Reactance	0.071	0.076
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	1.250	1.345
X'd Dir. Axis Transient	0.125	0.135
X''d Dir. Axis Subtransient	0.126	0.136
Xq Quad. Axis Reactance	0.859	0.924
X''q Quad. Axis Subtransient	0.167	0.179
XL Stator Leakage Reactance	0.085	0.091
X2 Negative Sequence Reactance	0.254	0.274
X0 Zero Sequence Reactance	0.083	0.089
Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.025	
T''d SUB-TRANSTIME CONST.	0.001	
T'do O.C. FIELD TIME CONST.	0.508	
Ta ARMATURE TIME CONST.	0.012	

ES/A055C575, C.1, Released, SPECIFICATION, PERFORMANCE, Page 2 of 9, System: cmijplm.cummins.com Downloaded: 10-17-2024 12:19UTC
 SIID: XgfcJluuQCun9L_Y15VTDTVxse4NcCDz7TD0srSzUhbq8yWAYeuRFR_118xXMqWg5

STAMFORD®

S0L2-G1 Winding 06 / 706



Resistances in Ohms (Ω) at 22°C	
Stator Winding Resistance (Ra)	0.141 Ω per phase series connected
Rotor Winding Resistance (Rf)	0.644 Ω
Exciter Stator Winding Resistance	14.624 Ω
Exciter Rotor Winding Resistance	0.135 Ω per phase
Positive Sequence Resistance (R1)	0.176 Ω
Negative Sequence Resistance (R2)	0.203 Ω
Zero Sequence Resistance (R0)	0.176 Ω
Aux Winding Resistance (with winding 706 only)	2.731 Ω
Mechanical data	
Cooling Air	0.126 m ³ /sec (50Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.
Bearing	Single Bearing
Weight Complete Alternator	104.6kg
Weight Wound Stator	40.5kg
Weight Wound Rotor	36.8 kg
Moment of Inertia	0.127kgm ²
Shipping weight in a Crate	143 kg
Packing Crate Size	930X590X760 mm
Maximum Over Speed	2250 RPM for two minutes
Bearing Drive End	N/A
Bearing Non-Drive End	Ball Bearing, 6305-2RS1

STAMFORD

S0L2-G1 Winding 06 / 706

Single Phase Efficiency Curves


60Hz Curves

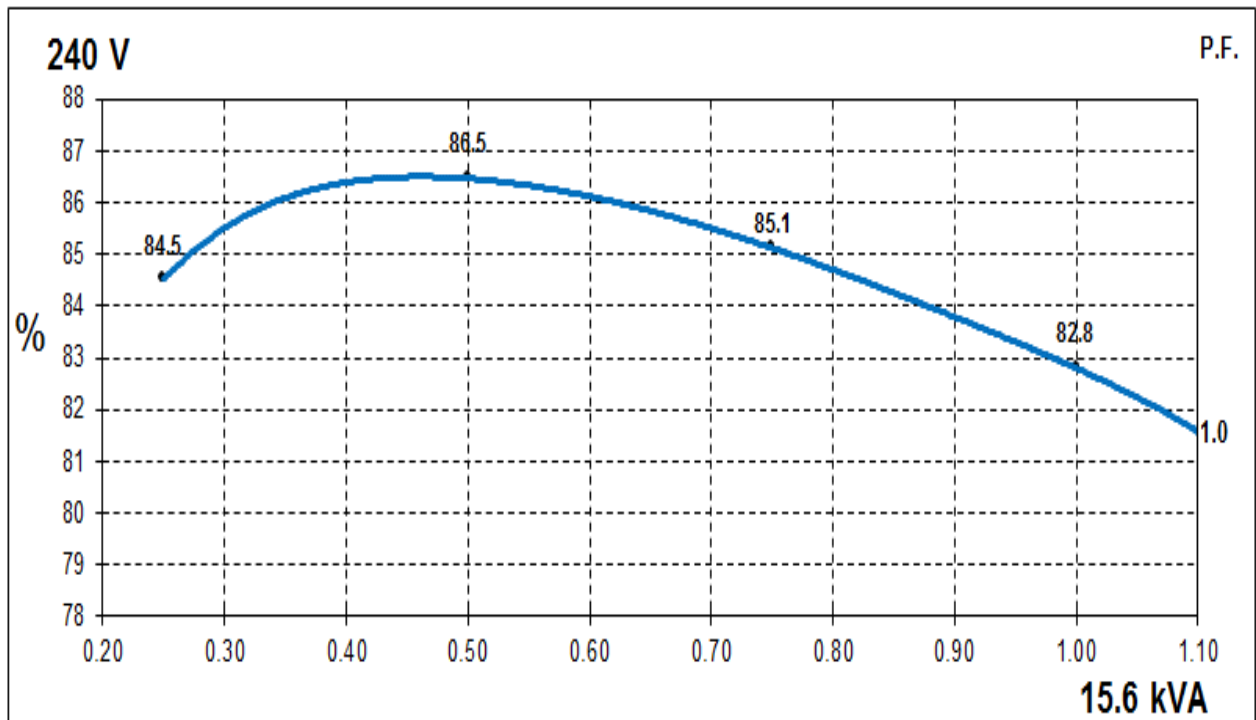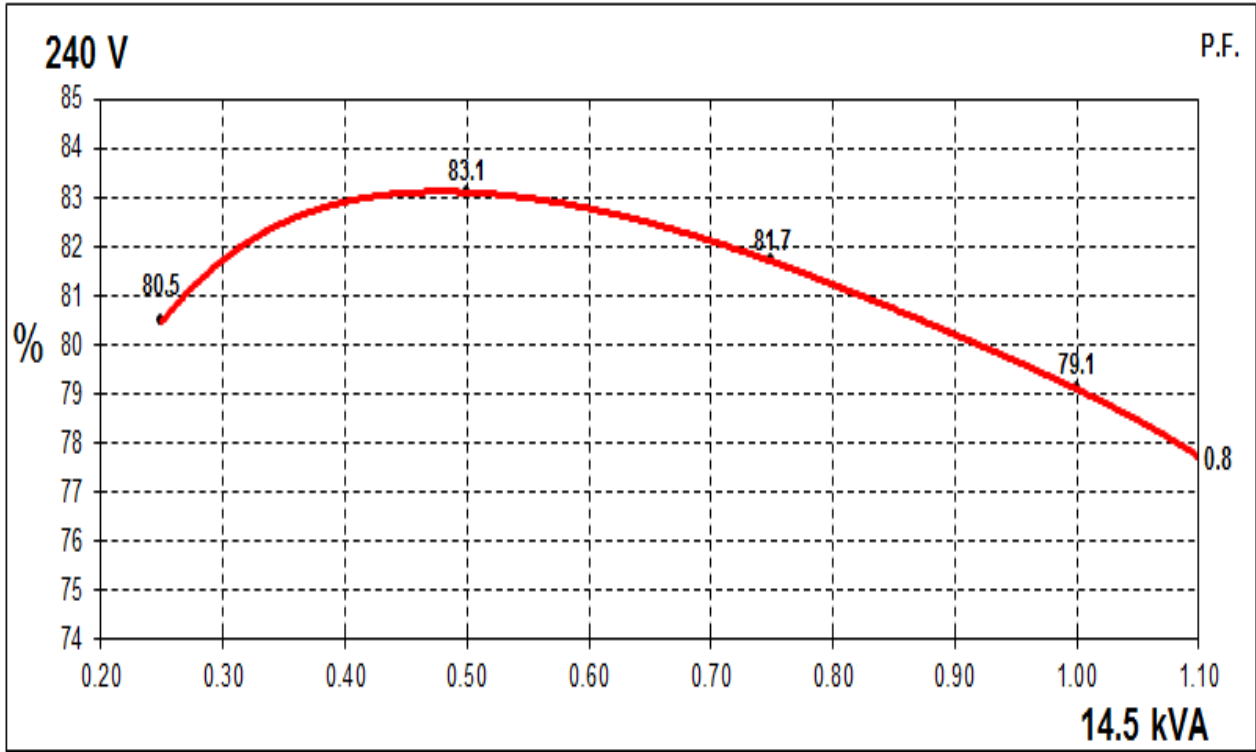

STAMFORD

S0L2-G1 Winding 06 / 706

Locked Rotor Motor Starting Curves

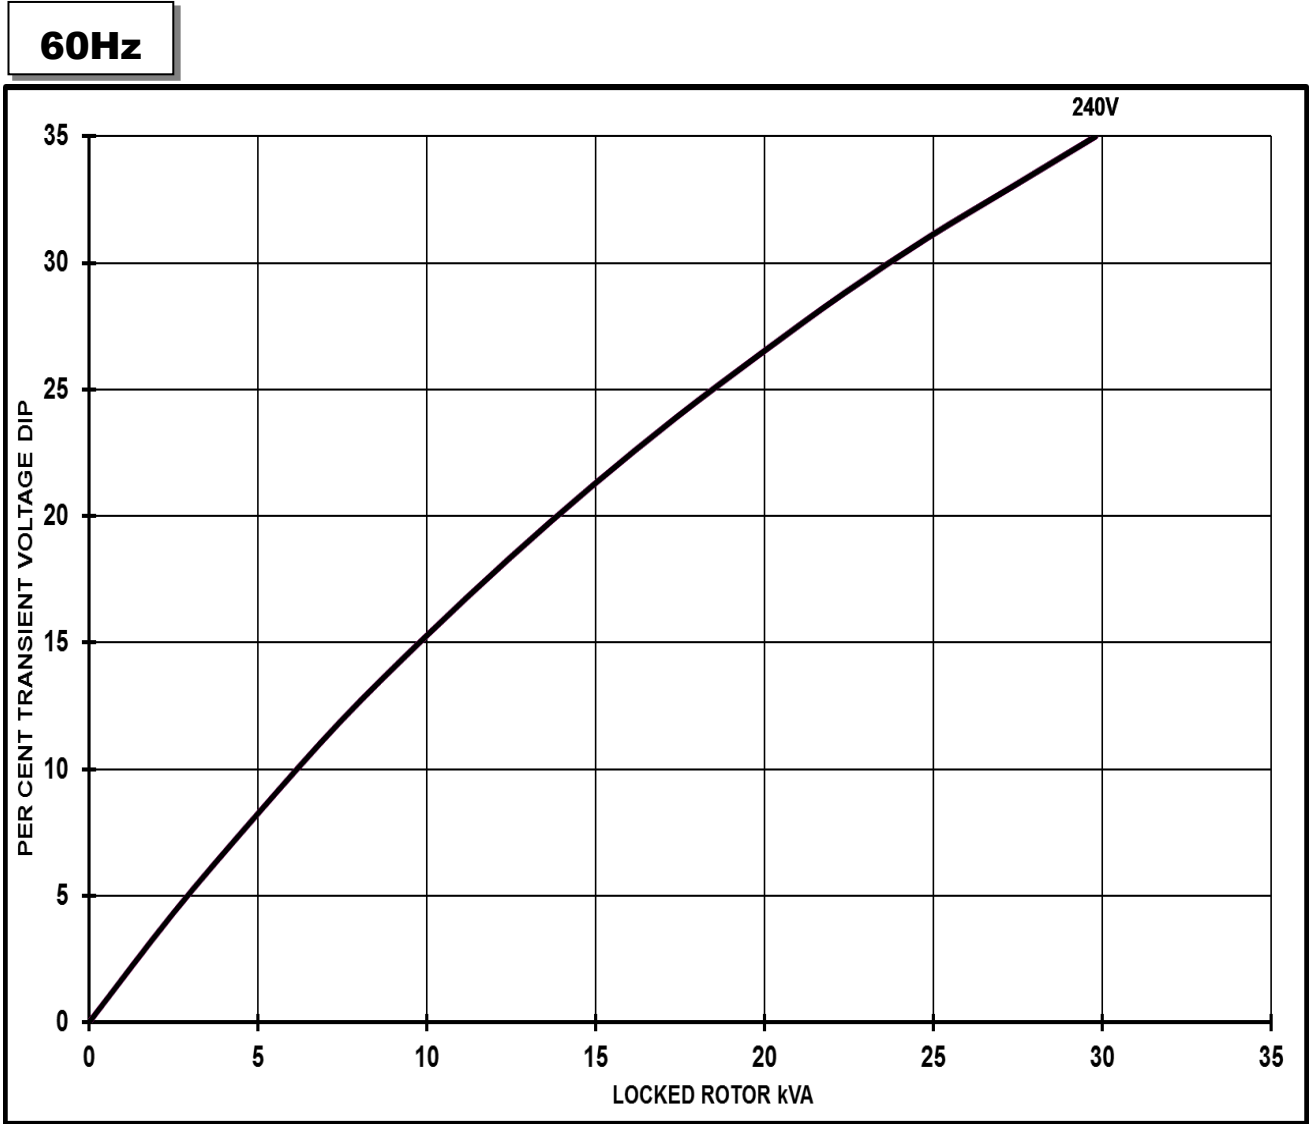

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1.00	
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	

Cummins Data Classification: CUMMINS CONFIDENTIAL


ES:A055C575, C.1, Released, SPECIFICATION, PERFORMANCE, Page 5 of 9, System: cmipm.cummins.com Downloaded: 10-17-2024 12:19UTC
 SUID: XgfcJluuQCun9l_Yi5VTdTvxse4NcCDzTD0srStzUbg8yW7AyeuRFR_118xXMQWg5

STAMFORD

S0L2-G1 Winding 706

Short Circuit Decrement Curve

Note: Applicable only for Winding 706 (Auxiliary winding).
Winding 06 (no Auxiliary winding) will not provide short circuit capability.

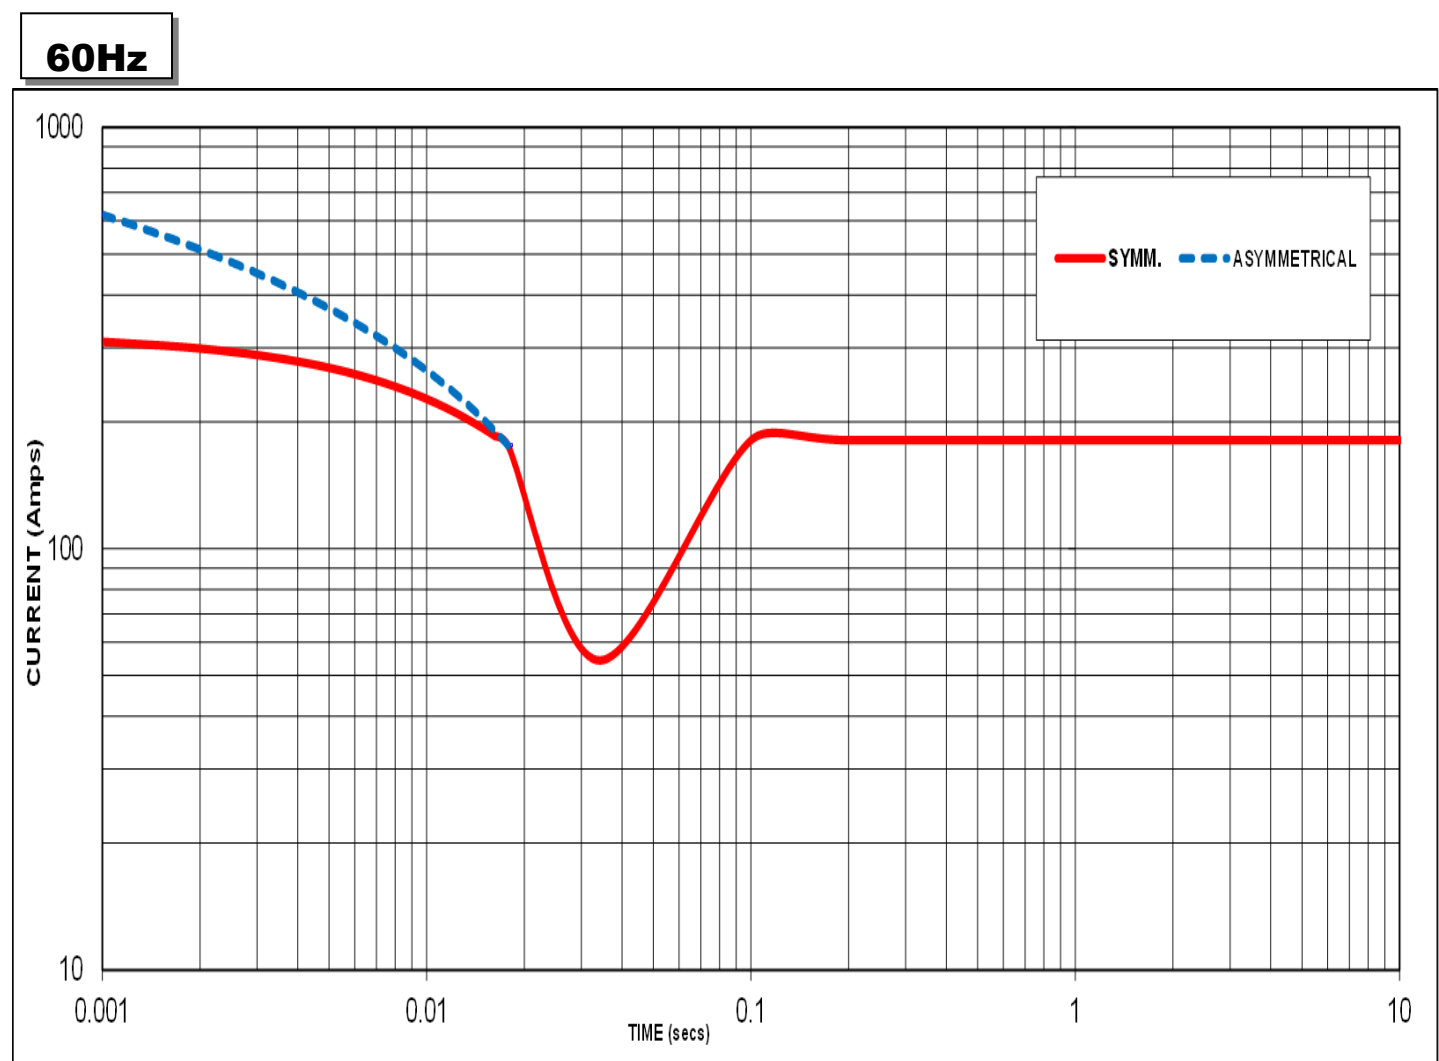


Sustained Short Circuit = 181 Amps

STAMFORD

S0L2-G1 Winding 06 / 706

Typical Alternator Operating Chart

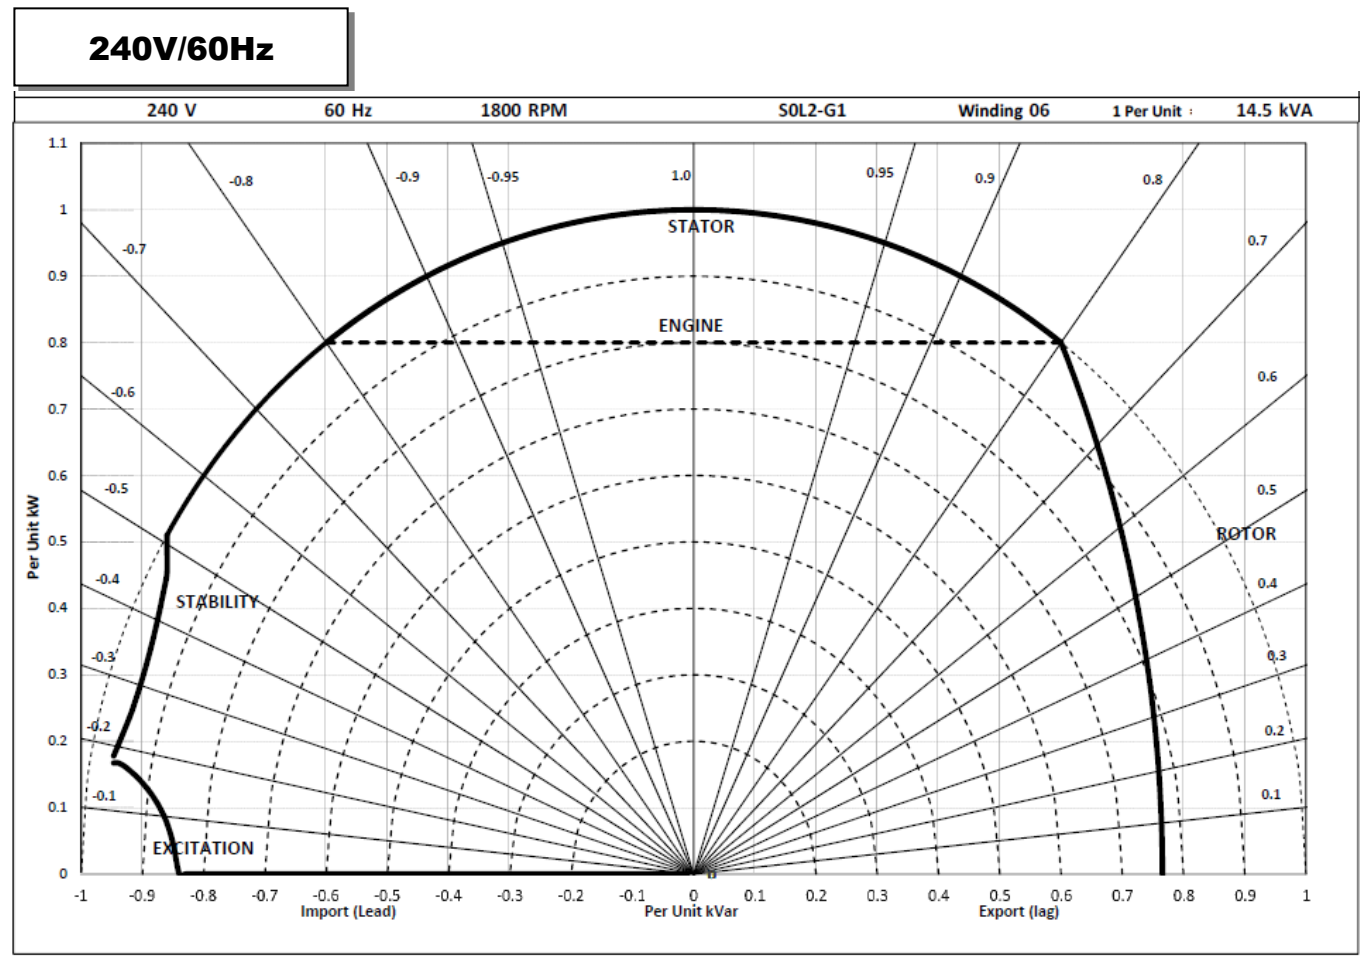

STAMFORD®

S0L2-G1 Winding 06 / 706

RATINGS AT 0.8/1.0 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C		Standby - 150/40°C		Cont. H - 125/40°C		Cont. F - 105/40°C	
60 Hz	Series (V)	240	240	240	240	240	240	240	240
	Parallel(V)	120	120	120	120	120	120	120	120
	Power Factor	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0
	kVA	15.8	17.1	15.4	16.6	14.5	15.6	13.1	14.1
	kW	12.6	17.1	12.3	16.6	11.6	15.6	10.5	14.1
	Efficiency (%)	77.9	81.6	78.2	82.0	79.1	82.8	80.2	83.7
	kW Input	16.2	21.0	15.8	20.2	14.7	18.8	13.1	16.8

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2024. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

