

STAMFORD®

S9M1D-D4 Wdg.51 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	DM110	DECS100	DECS150		
Voltage Regulation	± 0.25%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	9.6 - 9.7
No Load Excitation Current (A)	0.9 - 0.9
Full Load Excitation Voltage (V)	43
Full Load Excitation Current (A)	3.9
Exciter Time Constant (seconds)	0.24

STAMFORD®

S9M1D-D4 Wdg.51

Electrical Data		
Insulation System	H	
Stator Winding	Double Layer Lap	
Winding Pitch	5/6	
Winding Leads	6	
Winding Number	51	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others	
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	42.28	
	50 Hz	60 Hz
Telephone Interference	THF < 2%	TIF < 50
Cooling Air Flow	2.78 m³/sec	3.33 m³/sec
Voltage Star (V)	3300	4160
Voltage Parallel Star (V)	-	-
Voltage Delta (V)	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	2719	3309
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.810	2.582
X'd Dir. Axis Transient	0.246	0.226
X''d Dir. Axis Subtransient	0.169	0.155
Xq Quad. Axis Reactance	1.414	1.299
X''q Quad. Axis Subtransient	0.326	0.300
XL Stator Leakage Reactance	0.132	0.121
X2 Negative Sequence Reactance	0.249	0.229
X0 Zero Sequence Reactance	0.166	0.153
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	3.372	3.099
X'd Dir. Axis Transient	0.283	0.260
X''d Dir. Axis Subtransient	0.198	0.182
Xq Quad. Axis Reactance	1.456	1.338
X''q Quad. Axis Subtransient	0.391	0.360
XL Stator Leakage Reactance	0.149	0.137
Xlr Rotor Leakage Reactance	0.284	0.261
X2 Negative Sequence Reactance	0.299	0.275
X0 Zero Sequence Reactance	0.194	0.178

STAMFORD®

S9M1D-D4 Wdg.51


Time Constants (Seconds)		
T'd Transient Time Const.	0.225	
T'd Sub-Transient Time Const.	0.019	
T'do O.C. Field Time Const.	3.39	
Ta Armature Time Const.	0.102	
T"q Sub-Transient Time Const.	0.02	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.0300	
Rotor Winding Resistance (Rf)	0.57	
Exciter Stator Winding Resistance	9.8	
Exciter Rotor Winding Resistance per phase	0.014	
PMG Phase Resistance (Rpmg) per phase	1.91	
Positive Sequence Resistance (R1)	0.0375	
Negative Sequence Resistance (R2)	0.0432	
Zero Sequence Resistance (R0)	0.0375	
Saturation Factors	3300V	4160V
SG1.0	0.152	0.164
SG1.2	0.63	0.688
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	0, 00	0, 00, None
Moment of Inertia	82.1 kgm ²	80 kgm ²
Weight Wound Stator	1953kg	1833kg
Weight Wound Rotor	1953.2kg	1791kg
Weight Complete Alternator	5550kg	5500kg
Shipping weight in a Crate	5800kg	5750kg
Packing Crate Size	260 x 200 x 220(cm)	260 x 200 x 220(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	6232
Bearing Non-Drive End	6324	6324

STAMFORD®


S9M1D-D4 Wdg.51

THREE PHASE EFFICIENCY CURVES

50Hz

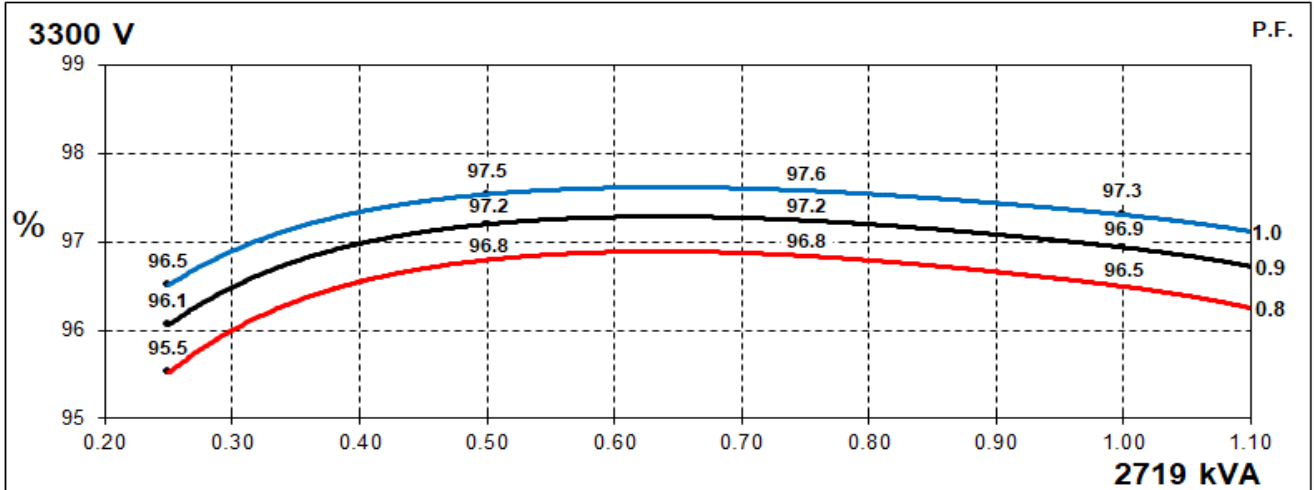

60Hz

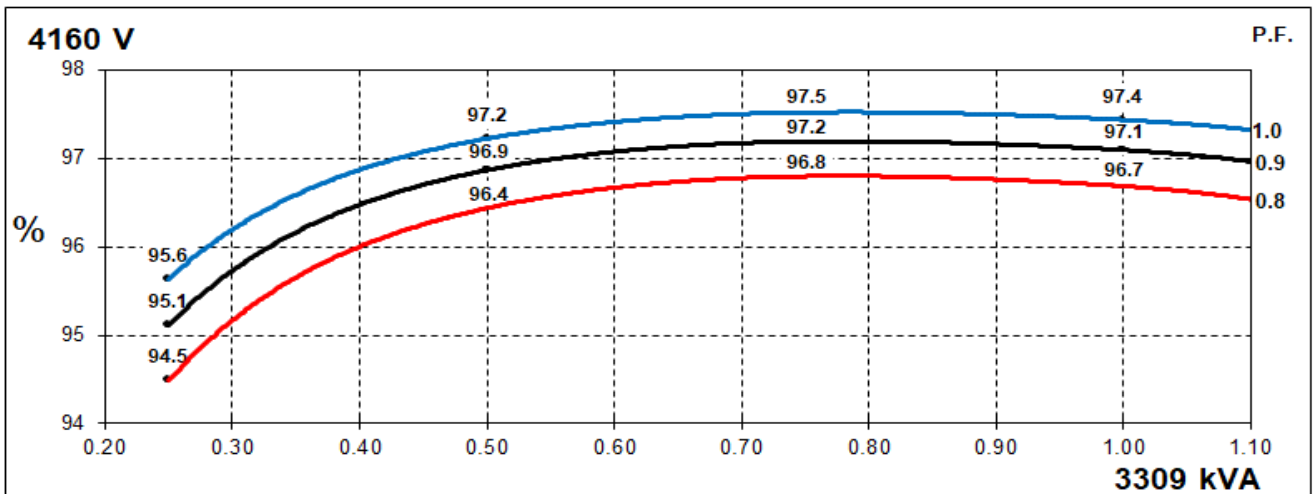


STAMFORD®


S9M1D-D4 Wdg.51

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

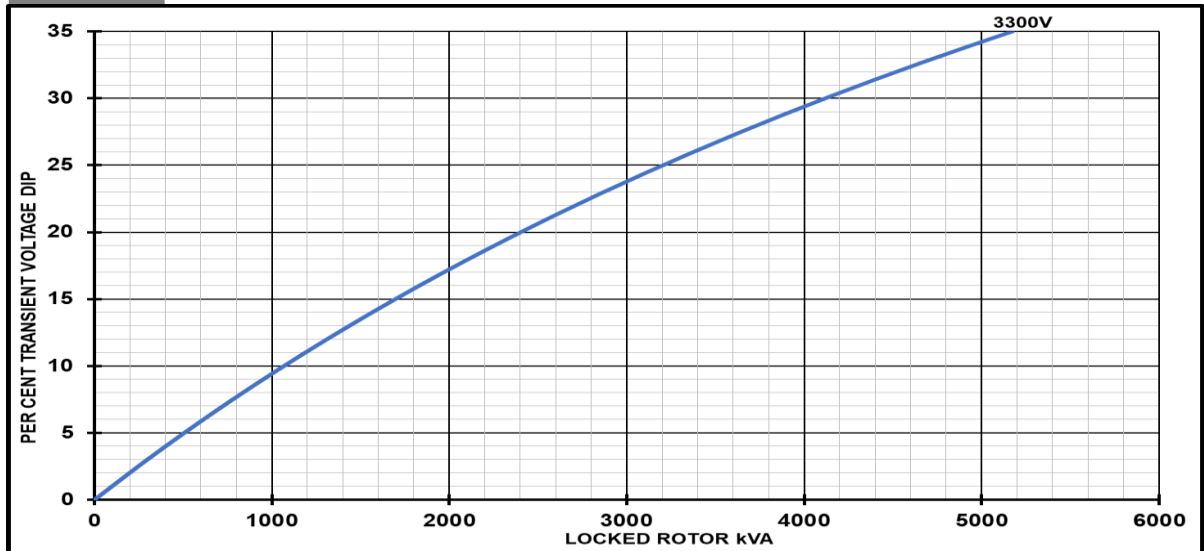

60Hz

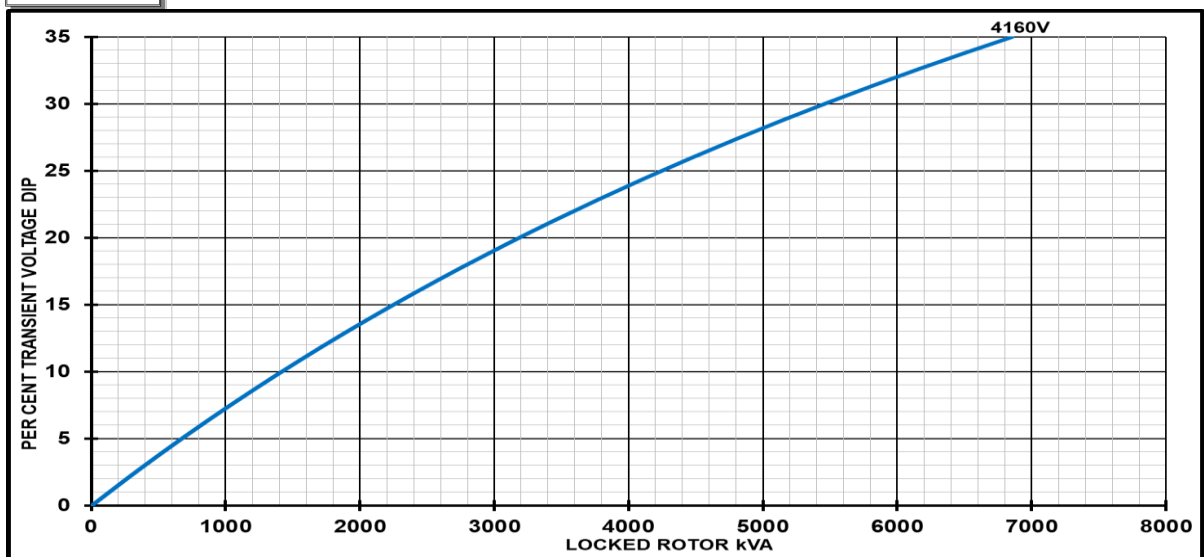

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD[®]

S9M1D-D4 Wdg.51


Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

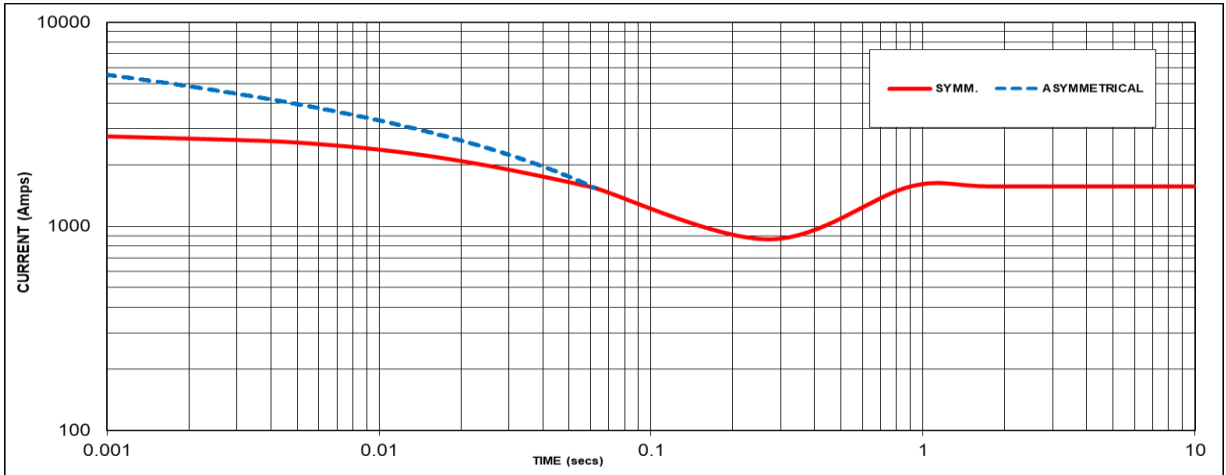

Sustained Short Circuit = 1569 Amps

60Hz

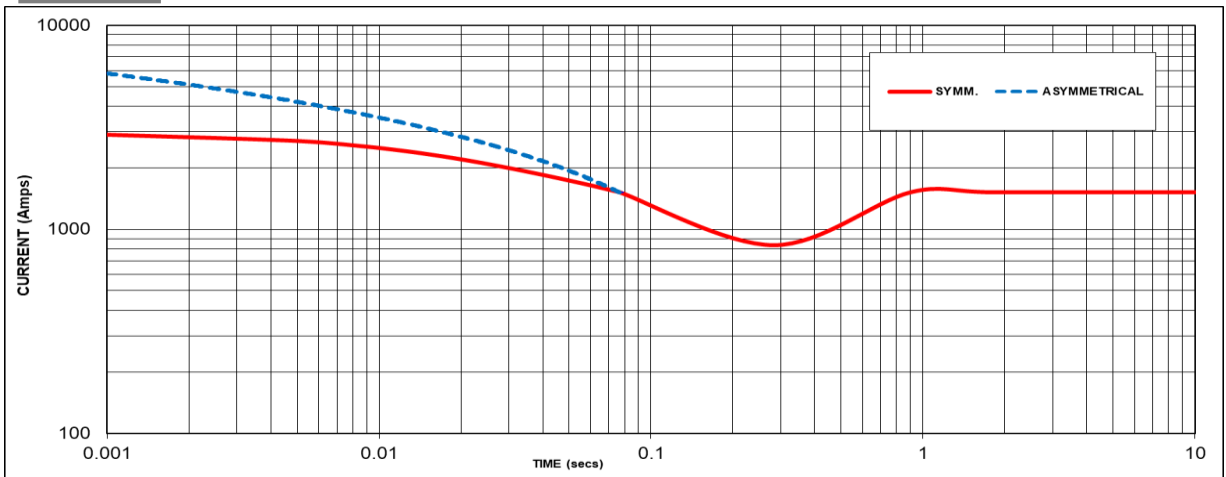

Sustained Short Circuit = 1515 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
3300V	X 1.00	4160V	X 1.00
-	-	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD


S9M1D-D4 Wdg.51

Typical Alternator Operating Charts

3300V/50Hz

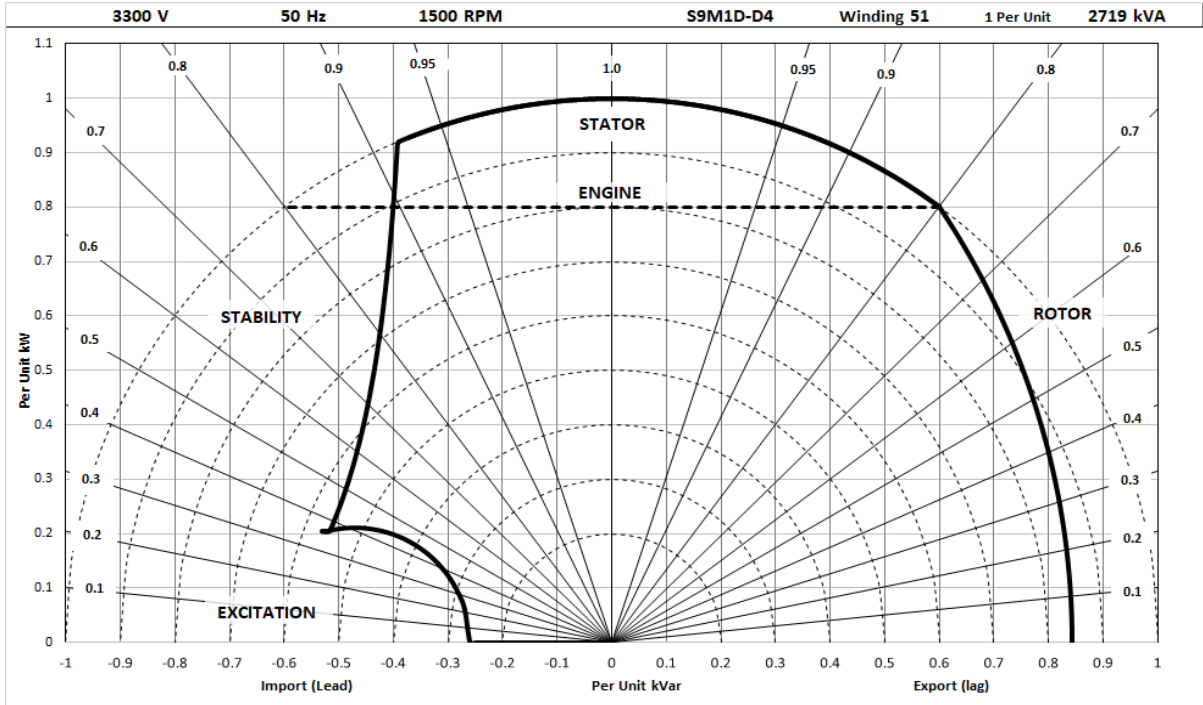

4160V/60Hz

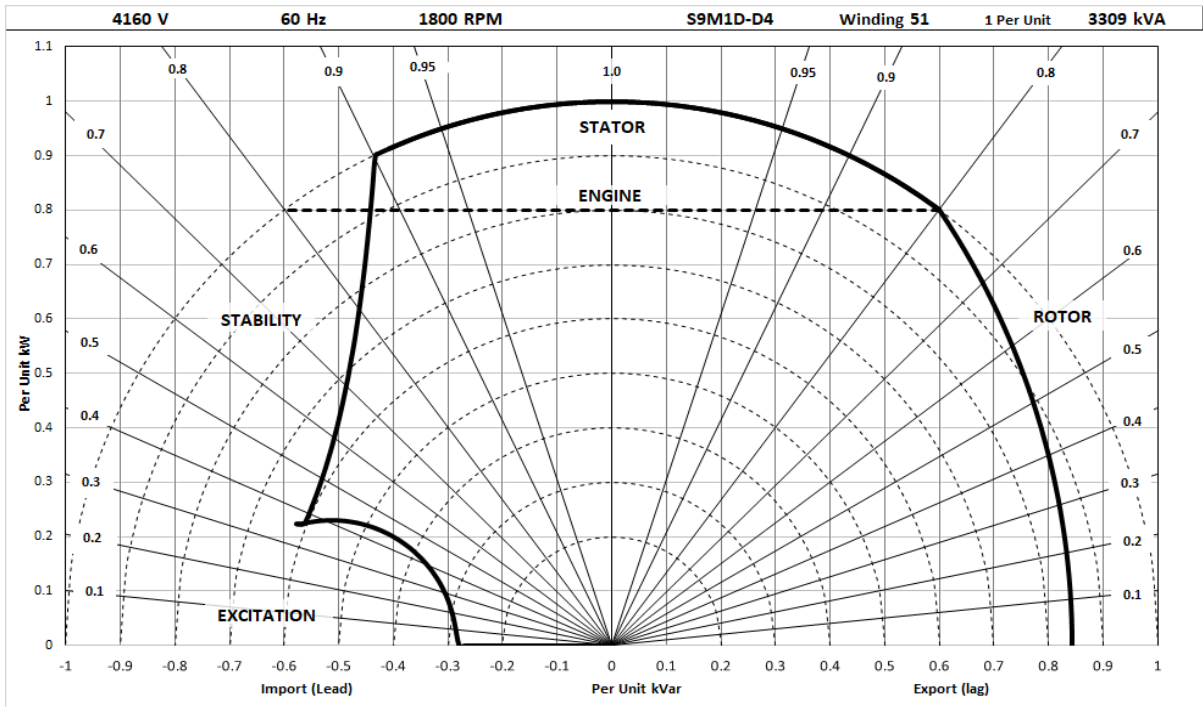

STAMFORD®

S9M1D-D4 Wdg.51

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C	Cont. B - 80/40°C
50 Hz	Star (V)	3300	3300	3300	3300
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	2909	2719	2501	2175
	kW	2327	2175	2001	1740
	Efficiency (%)	96.3	96.5	96.6	96.8
	kW Input	2416	2254	2070	1797

60 Hz	Star (V)	4160	4160	4160	4160
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	3541	3309	3044	2647
	kW	2833	2647	2435	2118
	Efficiency (%)	96.6	96.7	96.8	96.8
	kW Input	2933	2738	2517	2187

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For marine alternators, 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

**For Applications Support:
applications@cummins.com**

**For Customer Service:
emea.service@cummins.com**

**For General Enquiries:
Stamford-avk@cummins.com**

Copyright 2024. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

