

# STAMFORD®

## S4L1D-G Wdg.311 (Single Phase) - Technical Data Sheet

### Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System					
<b>AVR Type</b>	AS440	MX341	MX321		
<b>Voltage Regulation</b>	± 1%	± 1%	± 0.5%		with 4% Engine Governing
<b>Excitation Type</b>	Self-Excited	PMG	PMG		

<b>No Load Excitation Voltage (V)</b>	12 - 10
<b>No Load Excitation Current (A)</b>	0.7 - 0.6
<b>Full Load Excitation Voltage (V)</b>	48 - 45
<b>Full Load Excitation Current (A)</b>	2.6 - 2.4
<b>Exciter Time Constant (seconds)</b>	0.105

# STAMFORD®

## S4L1D-G Wdg.311 (Single Phase)

Electrical Data						
Insulation System	Class H					
IP Rating	IP23					
Stator Winding	Double Layer Concentric					
Winding Pitch	2/3					
Winding Leads	12					
Winding Number	311					
Number of Poles	4					
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others					
Waveform Distortion	NO LOAD < 2.5% NON-DISTORTING LINEAR LOAD < 5.0%					
Short Circuit Ratio	1/Xd					
Steady State X/R Ratio	27.45					
	50Hz			60Hz		
VOLTAGE DOUBLE DELTA	220 / 110	230 / 115	240 / 120	220 / 110	230 / 115	240 / 120
VOLTAGE PARALLEL DELTA	110	115	120	110	115	120
POWER FACTOR	0.8	0.8	0.8	0.8	0.8	0.8
KVA BASE RATING FOR REACTANCE VALUES	215	215	215	231	242	253
Saturated Values in Per Unit at Base Ratings and Voltages						
Xd Dir. Axis Synchronous	2.64	2.41	2.22	3.40	3.26	3.13
X'd Dir. Axis Transient	0.14	0.13	0.12	0.18	0.17	0.16
X" d Dir. Axis Subtransient	0.08	0.08	0.07	0.11	0.10	0.10
Xq Quad. Axis Reactance	2.05	1.87	1.72	2.64	2.53	2.43
X" q Quad. Axis Subtransient	0.25	0.23	0.21	0.32	0.30	0.29
Xl Leakage Reactance	0.07	0.07	0.06	0.09	0.09	0.09
X2 Negative Reactance	0.14	0.13	0.12	0.19	0.18	0.17
X0 Zero Sequence	0.03	0.02	0.02	0.03	0.03	0.03
Unaturated Values in Per Unit at Base Ratings and Voltages						
Xd Dir. Axis Synchronous	3.16	2.90	2.66	4.08	3.91	3.75
X'd Dir. Axis Transient	0.16	0.15	0.13	0.20	0.20	0.19
X" d Dir. Axis Subtransient	0.10	0.09	0.08	0.13	0.12	0.12
Xq Quad. Axis Reactance	2.11	1.93	1.77	2.72	2.60	2.50
X" q Quad. Axis Subtransient	0.30	0.27	0.25	0.38	0.36	0.35
Xl Leakage Reactance	0.08	0.08	0.07	0.11	0.10	0.10
X2 Negative Reactance	0.17	0.16	0.15	0.22	0.21	0.21
X0 Zero Sequence	0.03	0.03	0.03	0.04	0.04	0.04
Time Constants (seconds)						
T'd TRANSIENT TIME CONST.	0.068					
T" d SUB-TRANSTIME CONST.	0.014					
T'do O.C. FIELD TIME CONST.	2.1					
Ta ARMATURE TIME CONST.	0.016					

# STAMFORD

## S4L1D-G Wdg.311 (Single Phase)


Resistances in Ohms ( $\Omega$ ) at 22°C	
Stator Winding Resistance (Ra) per phase series star connected	0.0066
Rotor Winding Resistance (Rf)	1.44
Exciter Stator Winding Resistance	18
Exciter Rotor Winding Resistance per phase	0.068
Positive Sequence Resistance (R1)	0.00825
Negative Sequence Resistance (R2)	0.009504
Zero Sequence Resistance (R0)	0.00825
PMG Phase Resistance (Rpmg) per phase	1.9
Mechanical data	
Cooling Air	0.78 m <sup>3</sup> /sec (50Hz)      0.94 m <sup>3</sup> /sec (60Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.
Bearing	Single Bearing
Weight Complete Alternator	1190 kg
Weight Wound Stator	561 kg
Weight Wound Rotor	482 kg
Moment of Inertia	5.6754 kgm <sup>2</sup>
Shipping weight in a Crate	1260 kg
Packing Crate Size	155 x 87 x 107 (cm)
Maximum Over Speed	2250 RPM for two minutes
Bearing Drive End	N/A
Bearing Non-Drive End	Ball Bearing, 6314

# STAMFORD®






## S4L1D-G Wdg.311 (Single Phase)

### Double Delta Efficiency Curves with 0.8PF

**50Hz Curves**

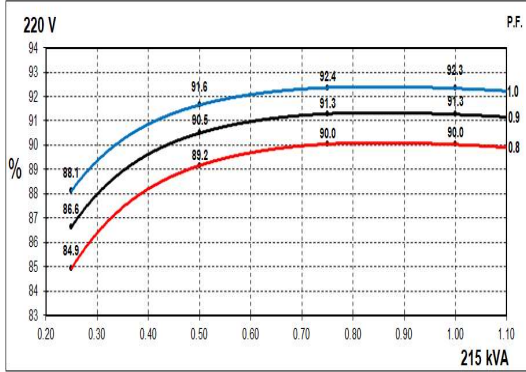

**60Hz Curves**

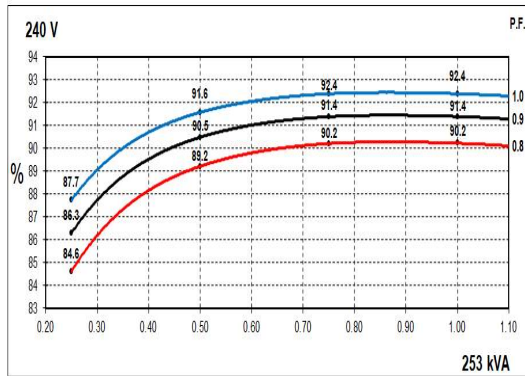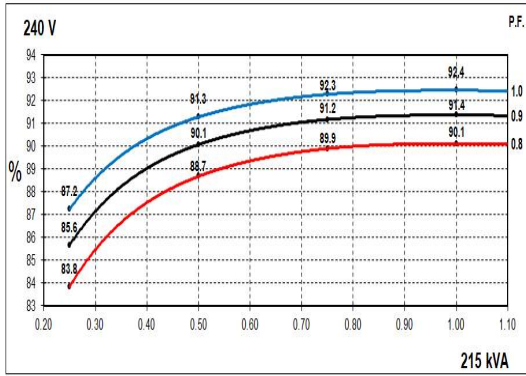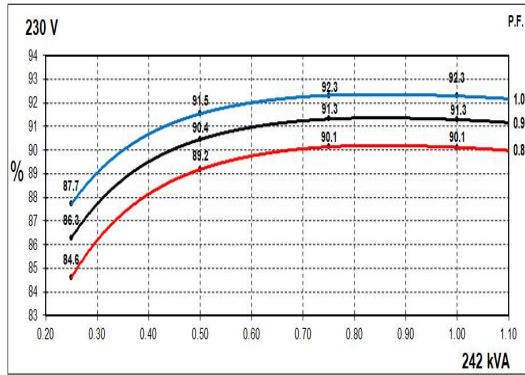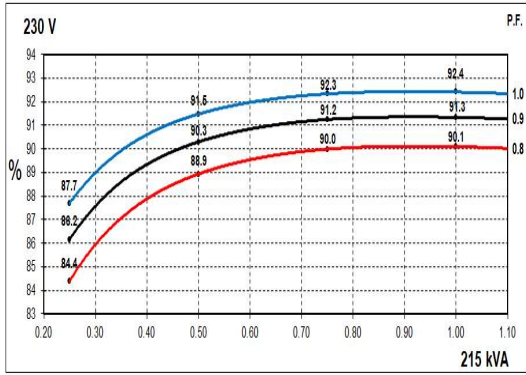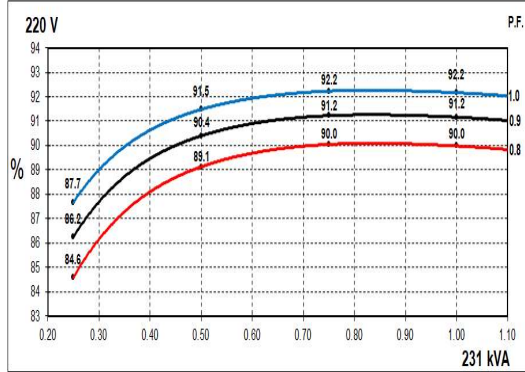


# STAMFORD®


## S4L1D-G Wdg.311 (Single Phase)

### Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

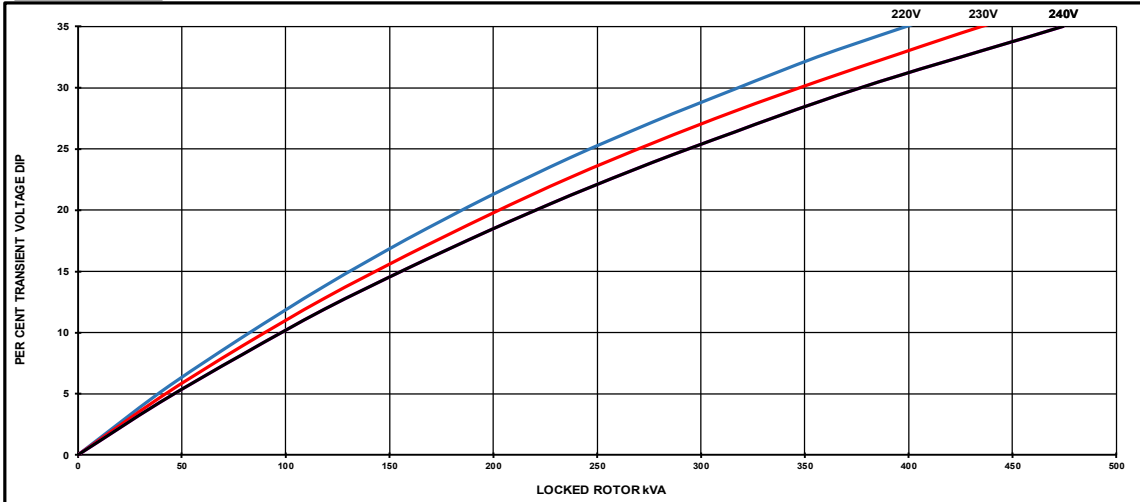

**60Hz**

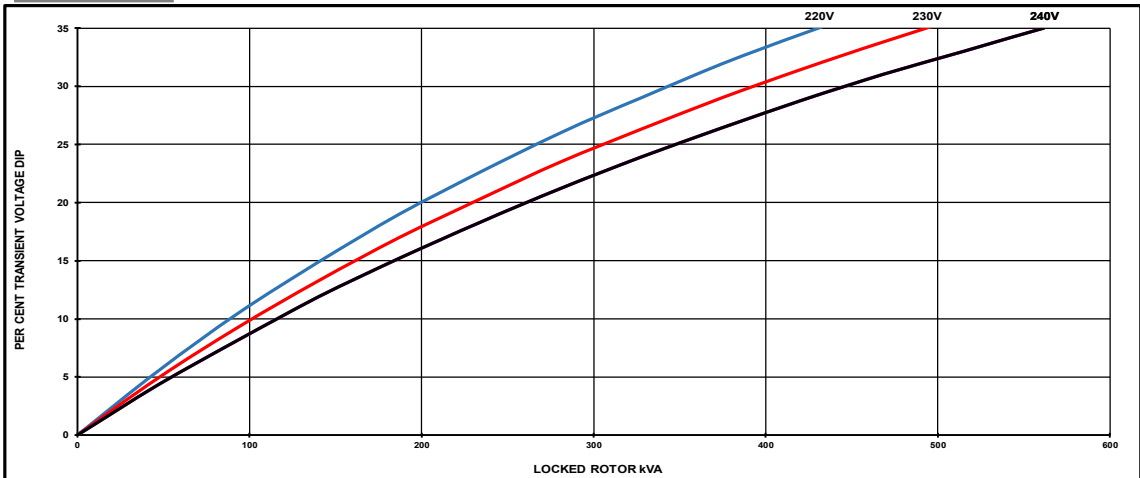


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1.00	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	

# STAMFORD®


S4L1D-G Wdg.311 (Single Phase)

## Locked Rotor Motor Starting Curves - Self Excited

**50Hz**

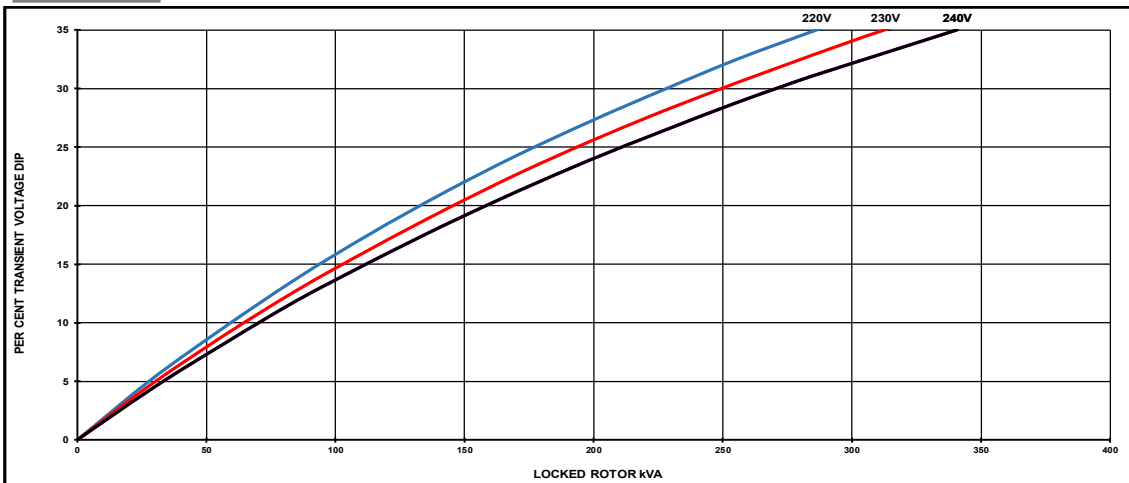

**60Hz**

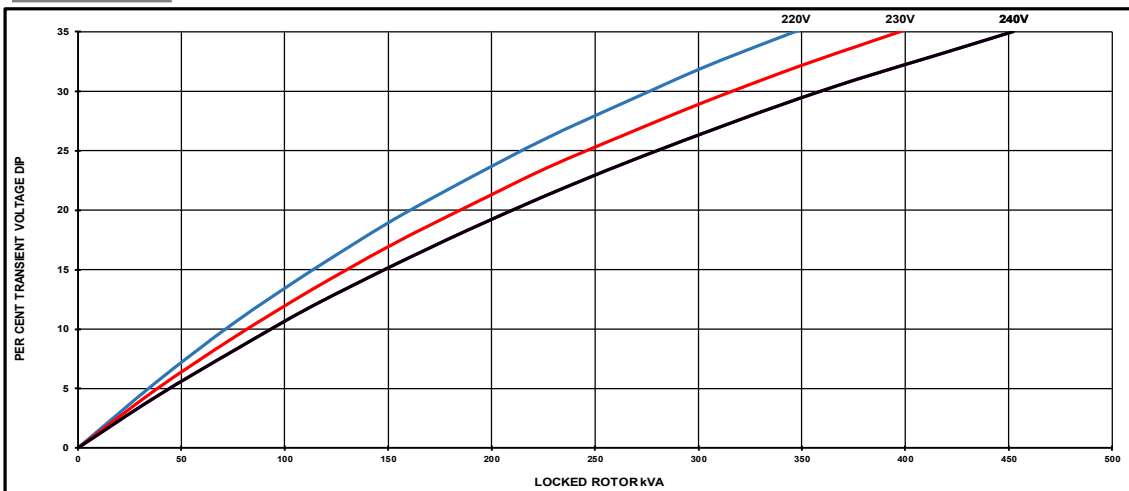


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1.00	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	

# STAMFORD®


## S4L1D-G Wdg.311 (Single Phase) Double Delta Short Circuit Decrement Curve

**50Hz**

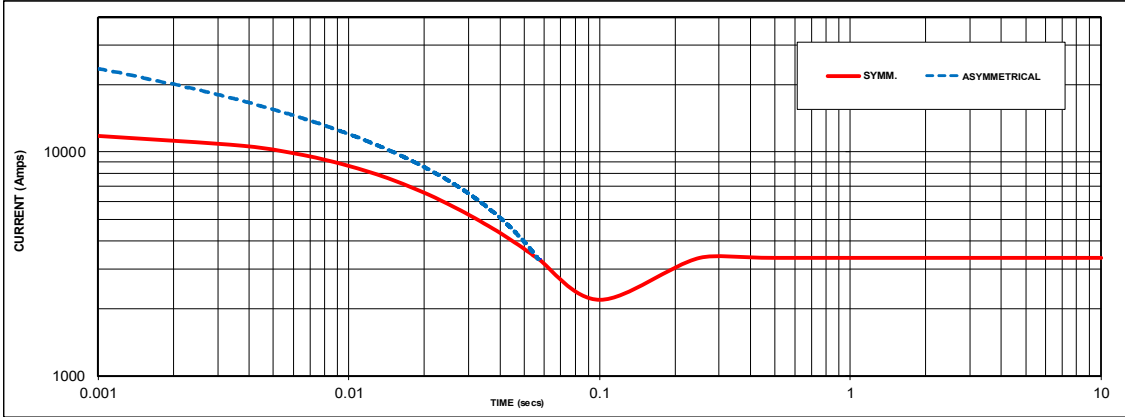

Sustained Short Circuit = 3360 Amps

**60Hz**

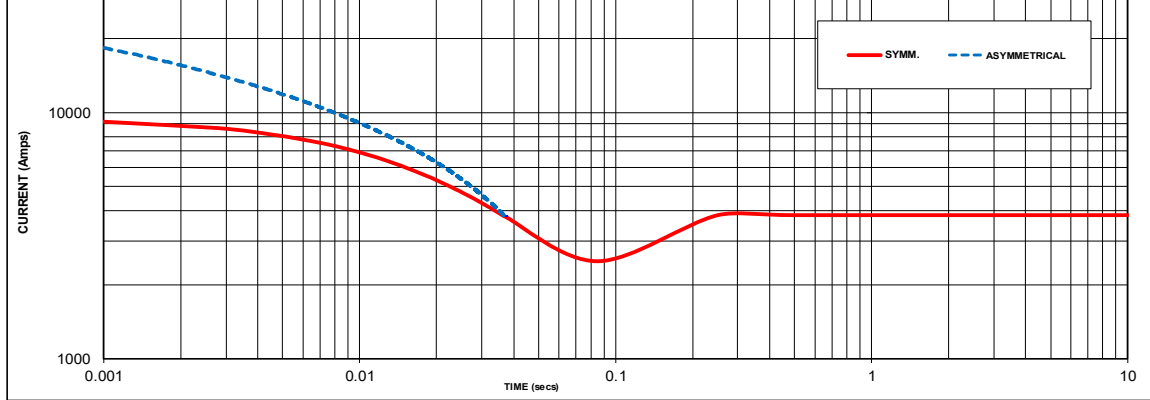

Sustained Short Circuit = 3840 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
220V	X 1.00	220V	X 1.00
230V	X 1.05	230V	X 1.05
240V	X 1.09	240V	X 1.09

The sustained current value is constant irrespective of voltage level

# STAMFORD


S4L1D-G Wdg.311 (Single Phase)

## Typical Alternator Operating Charts

230V/50Hz




### ALTERNATOR OPERATING CHART

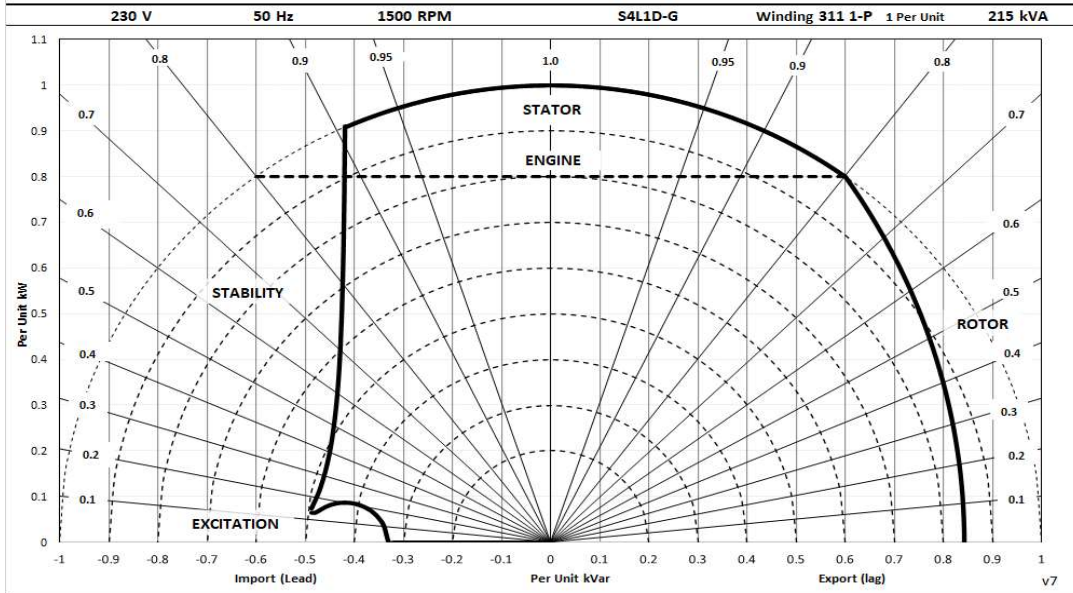

240V/60Hz



### ALTERNATOR OPERATING CHART

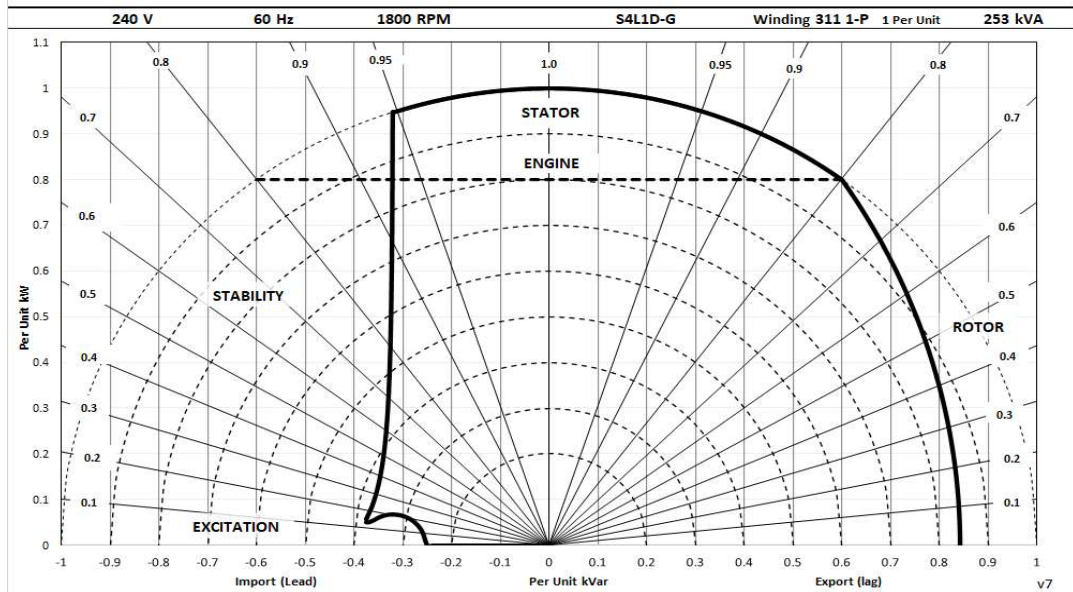



# STAMFORD®

## S4L1D-G Wdg.311 (Single Phase)

### RATINGS

#### 50Hz

Class - Temp Rise	Cont. F - 105/40°C			Cont. H - 125/40°C			Cont. F - 105/40°C			Cont. H - 125/40°C		
	<b>0.8pf</b>			<b>0.8pf</b>			<b>1.0pf</b>			<b>1.0pf</b>		
Double Delta (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel Delta (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	199	199	199	215	215	215	199	199	199	215	215	215
kW	159	159	159	172	172	172	199	199	199	215	215	215
Efficiency (%)	90.1	90.1	90.1	90.0	90.1	90.1	92.3	92.4	92.4	92.3	92.4	92.5
kW Input	177	177	177	191	191	191	216	215	215	233	233	233

#### 60Hz

Class - Temp Rise	Cont. F - 105/40°C			Cont. H - 125/40°C			Cont. F - 105/40°C			Cont. H - 125/40°C		
	<b>0.8pf</b>			<b>0.8pf</b>			<b>1.0pf</b>			<b>1.0pf</b>		
Double Delta (V)	220	230	240	220	230	240	220	230	240	220	230	240
Parallel Delta (V)	110	115	120	110	115	120	110	115	120	110	115	120
kVA	214	220	231	231	242	253	214	220	231	231	242	253
kW	171	176	185	185	194	202	214	220	231	231	242	253
Efficiency (%)	90.0	90.2	90.1	90.2	90.3	90.4	92.1	92.2	92.3	92.4	92.5	92.5
kW Input	190	195	205	205	214	224	232	239	250	250	262	273

# STAMFORD®

## S4L1D-G Wdg.311 (Single Phase)

### De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

[news.stamford-avk.com](https://news.stamford-avk.com)

**For Applications Support:**  
[applications@cummins.com](mailto:applications@cummins.com)

**For Customer Service:**  
[service-engineers@stamford-avk.com](mailto:service-engineers@stamford-avk.com)

**For General Enquiries:**  
[info@cumminsgeneratortechnologies.com](mailto:info@cumminsgeneratortechnologies.com)

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

