


STAMFORD[®]

HCM434E - Winding 311

Technical Data Sheet

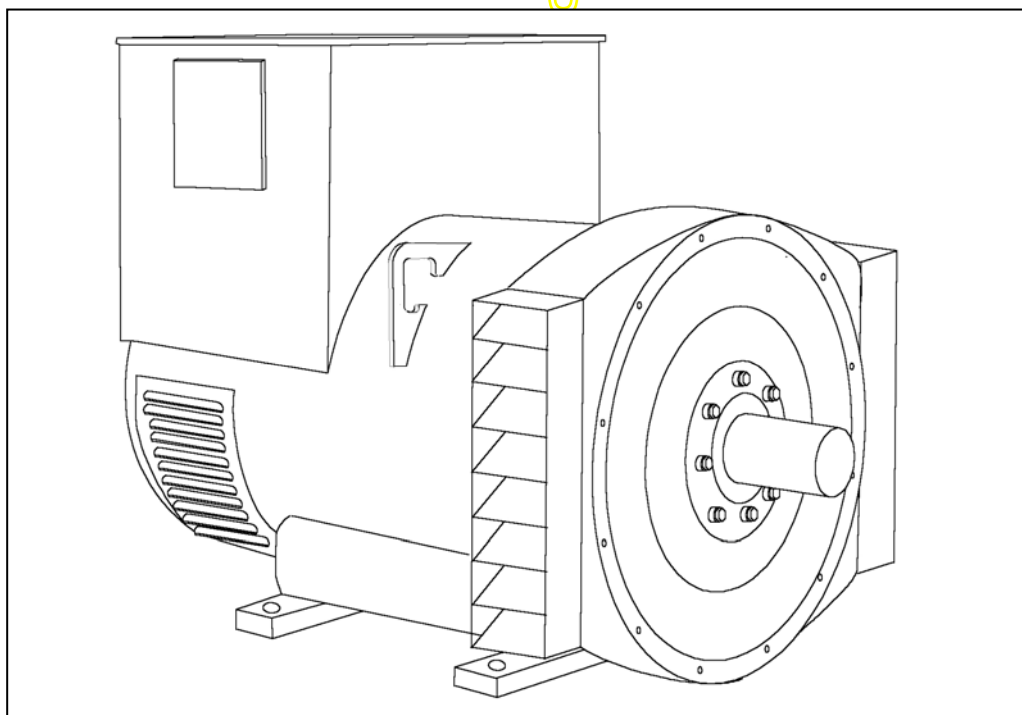

**HCM434E
SPECIFICATIONS & OPTIONS**

STANDARDS

Marine generators may be certified to Lloyds, DnV, Bureau Veritas, ABS, Germanischer-Lloyd or RINA. Other standards and certifications can be considered on request.

VOLTAGE REGULATORS

MX341 AVR - STANDARD

This sophisticated Automatic Voltage Regulator (AVR) is incorporated into the Stamford Permanent Magnet Generator (PMG) control system, and is standard on marine generators of this type.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%

DE RATES

All values tabulated on page 8 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 50°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

APPROVED DOCUMENT

HCM434E



WINDING 311

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.		
A.V.R.	MX321	MX341	
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)		





INSULATION SYSTEM	CLASS H								
PROTECTION	IP23								
RATED POWER FACTOR	0.8								
STATOR WINDING	DOUBLE LAYER LAP								
WINDING PITCH	TWO THIRDS								
WINDING LEADS	12								
STATOR WDG. RESISTANCE	0.009 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED								
ROTOR WDG. RESISTANCE	1.19 Ohms at 22°C								
EXCITER STATOR RESISTANCE	18 Ohms at 22°C								
EXCITER ROTOR RESISTANCE	0.068 Ohms PER PHASE AT 22°C								
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others								
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%								
MAXIMUM OVERSPEED	2250 Rev/Min								
BEARING DRIVE END	BALL. 6317 (ISO)								
BEARING NON-DRIVE END	BALL. 6314 (ISO)								
	1 BEARING				2 BEARING				
WEIGHT COMP. GENERATOR	1024 kg				1030 kg				
WEIGHT WOUND STATOR	470 kg				470 kg				
WEIGHT WOUND ROTOR	400 kg				377 kg				
WR ² INERTIA	4.6331 kgm ²				4.4343 kgm ²				
SHIPPING WEIGHTS in a crate	1095 kg				1100 kg				
PACKING CRATE SIZE	155 x 87 x 107(cm)				155 x 87 x 107(cm)				
	50 Hz				60 Hz				
TELEPHONE INTERFERENCE	THF<2%				TIF<50				
COOLING AIR	0.80 m ³ /sec 1700 cfm				0.99 m ³ /sec 2100 cfm				
VOLTAGE SERIES STAR	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277	
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138	
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138	
KVA BASE RATING FOR REACTANCE VALUES	295	295	295	295	340	350	365	370	
X _d DIR. AXIS SYNCHRONOUS	2.53	2.29	2.12	1.89	2.95	2.71	2.59	2.41	
X' _d DIR. AXIS TRANSIENT	0.17	0.15	0.14	0.13	0.18	0.16	0.16	0.15	
X'' _d DIR. AXIS SUBTRANSIENT	0.12	0.11	0.10	0.09	0.13	0.12	0.11	0.10	
X _q QUAD. AXIS REACTANCE	2.17	1.96	1.82	1.62	2.48	2.28	2.18	2.03	
X'' _q QUAD. AXIS SUBTRANSIENT	0.30	0.27	0.25	0.22	0.35	0.32	0.31	0.28	
X _L LEAKAGE REACTANCE	0.06	0.05	0.05	0.04	0.07	0.06	0.06	0.06	
X ₂ NEGATIVE SEQUENCE	0.20	0.18	0.17	0.15	0.24	0.22	0.21	0.19	
X ₀ ZERO SEQUENCE	0.08	0.07	0.07	0.06	0.09	0.08	0.07	0.07	
REACTANCES ARE SATURATED				VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED					
T' _d TRANSIENT TIME CONST.	0.08s								
T'' _d SUB-TRANSTIME CONST.	0.019s								
T' _{do} O.C. FIELD TIME CONST.	1.7s								
T _a ARMATURE TIME CONST.	0.018s								
SHORT CIRCUIT RATIO	1/X _d								

50
Hz

HCM434E
Winding 311

STAMFORD

THREE PHASE EFFICIENCY CURVES

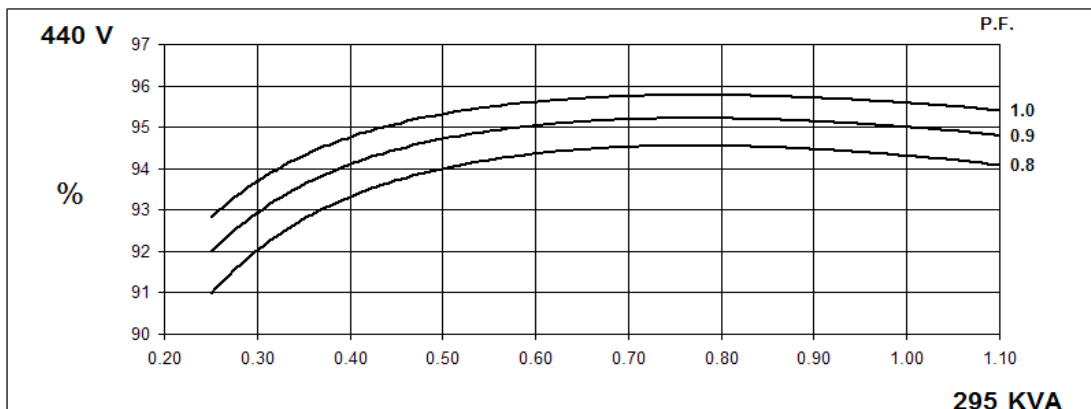
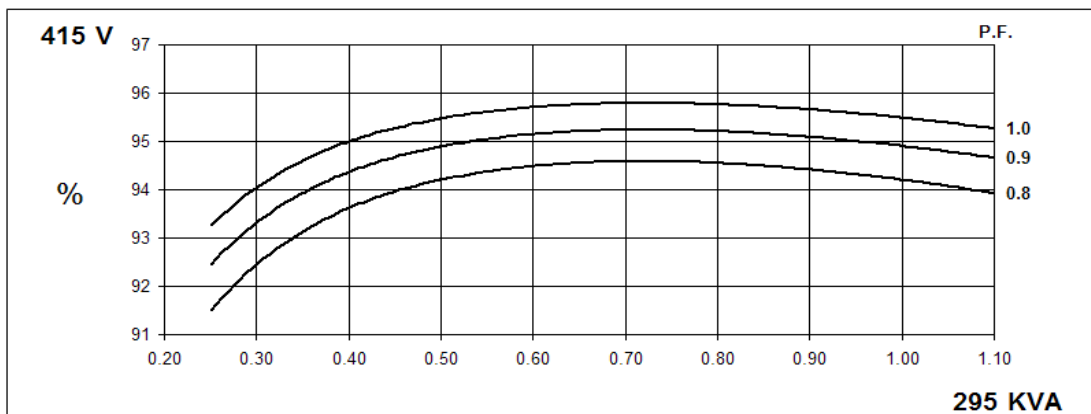
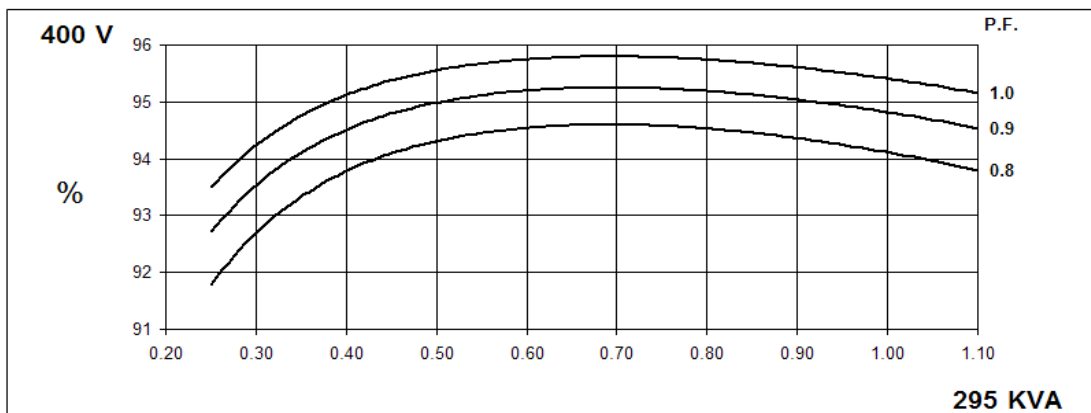
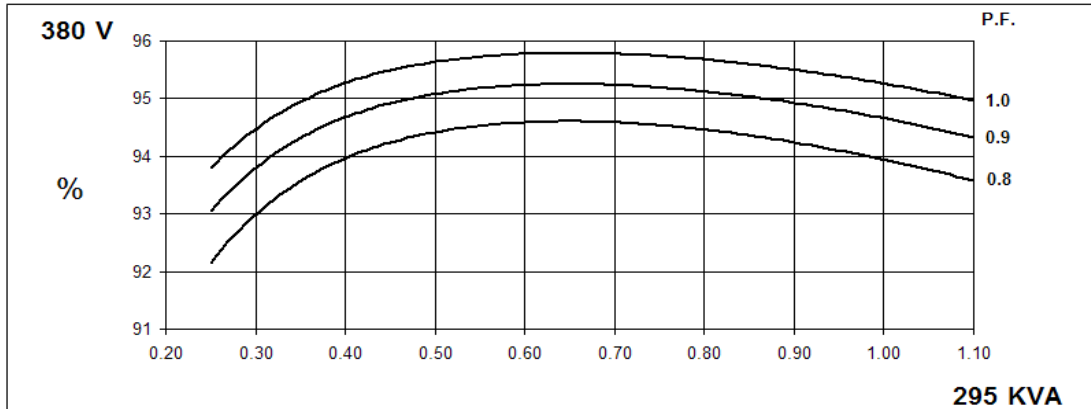


60
Hz

HCM434E
Winding 311

STAMFORD



THREE PHASE EFFICIENCY CURVES

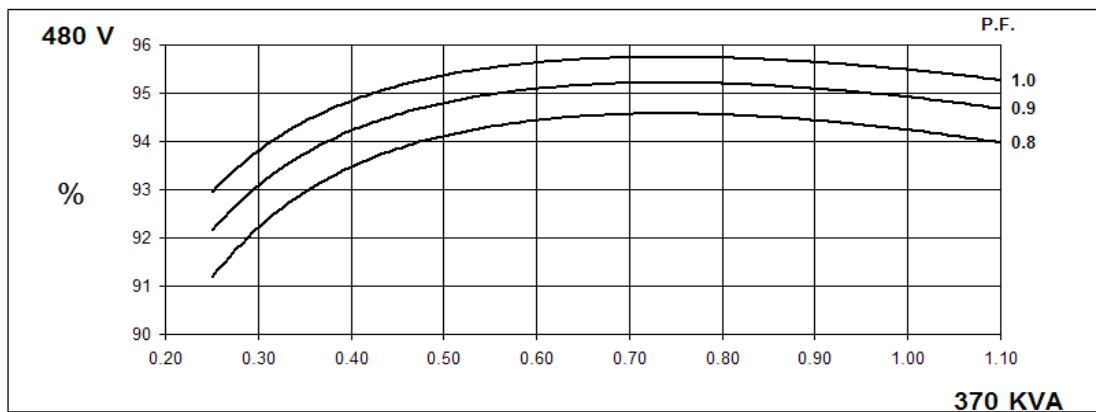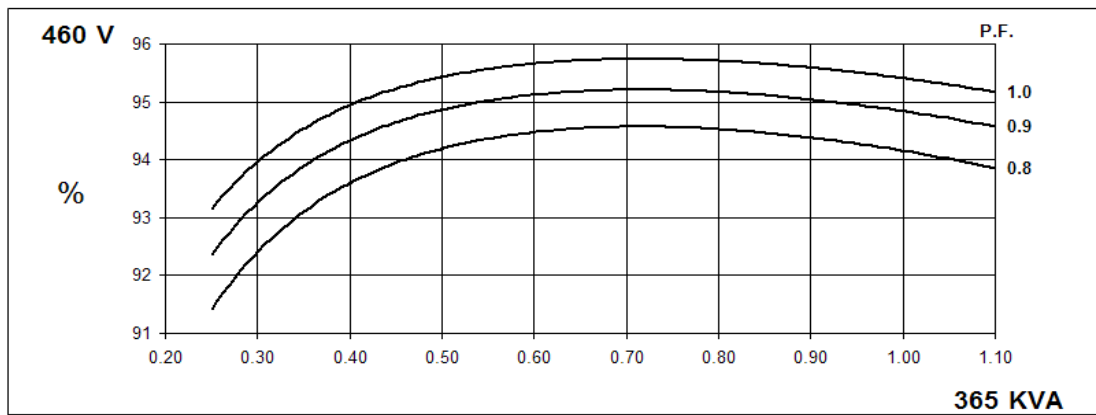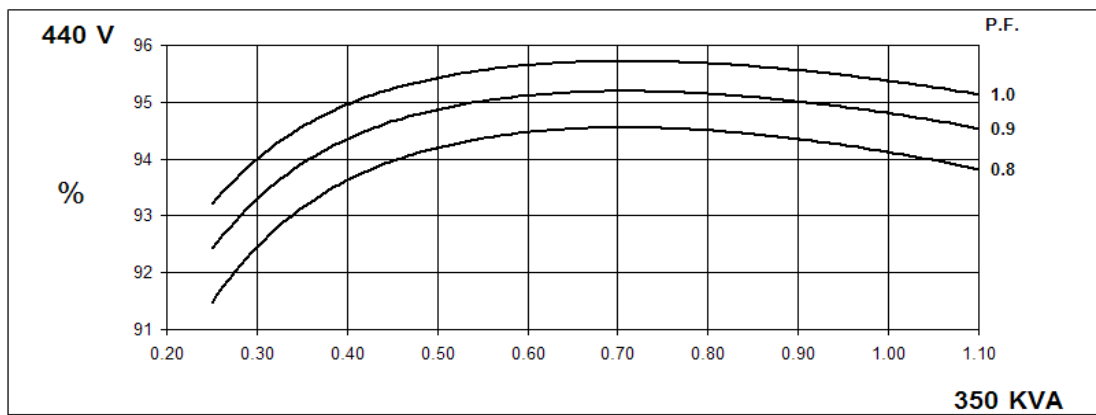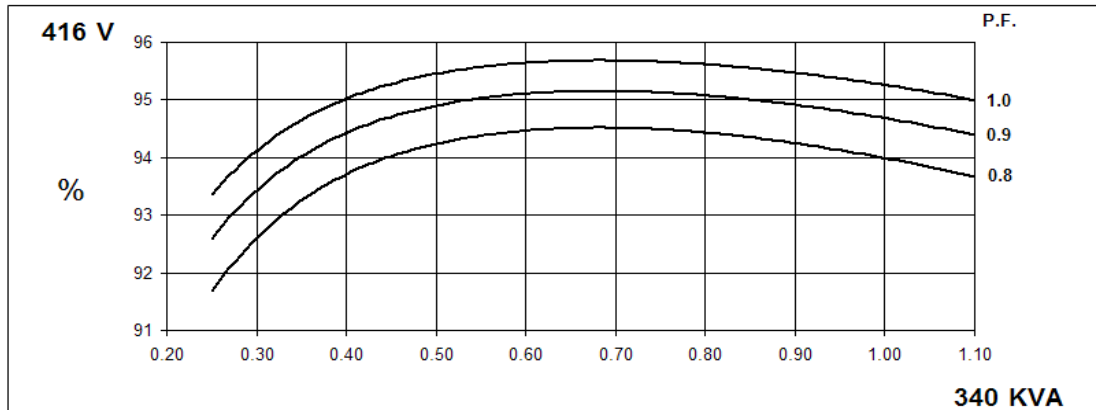

HCM434E
Winding 311


STAMFORD

Locked Rotor Motor Starting Curve

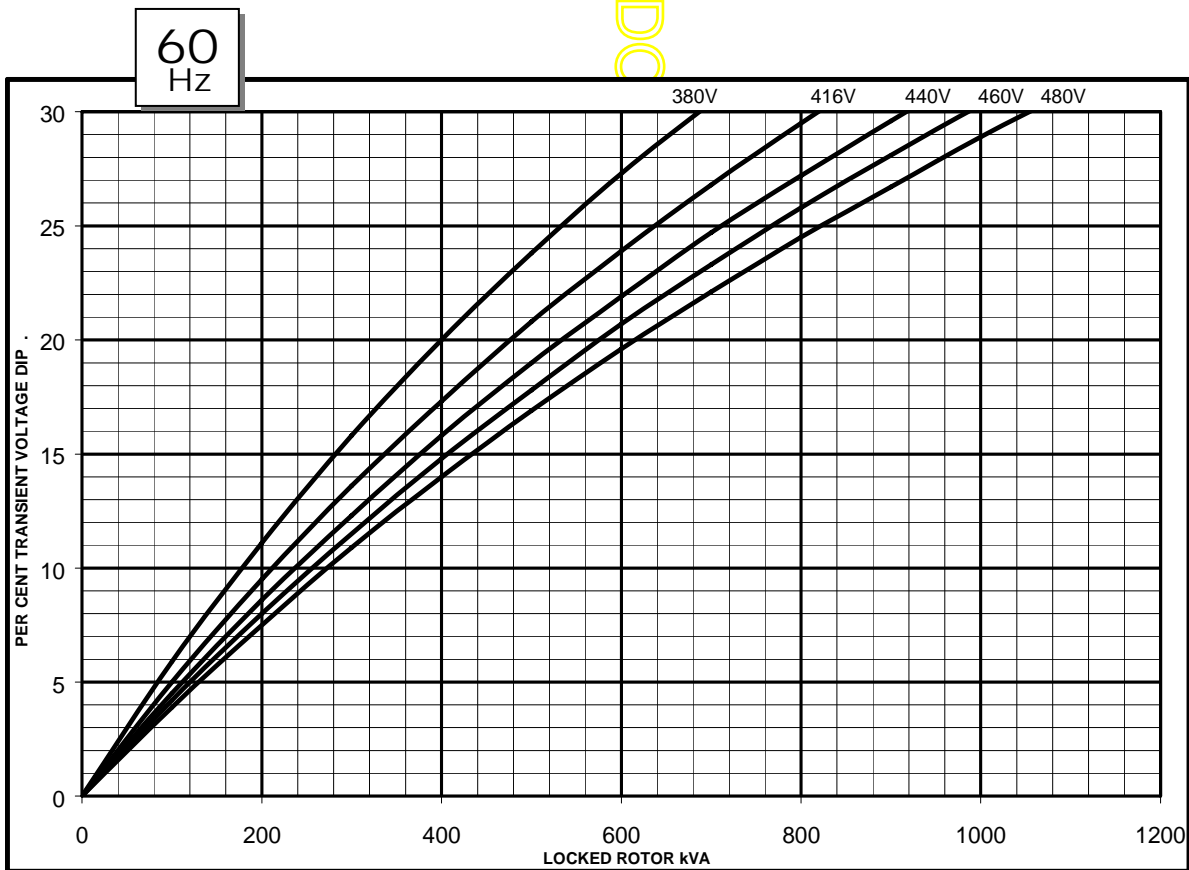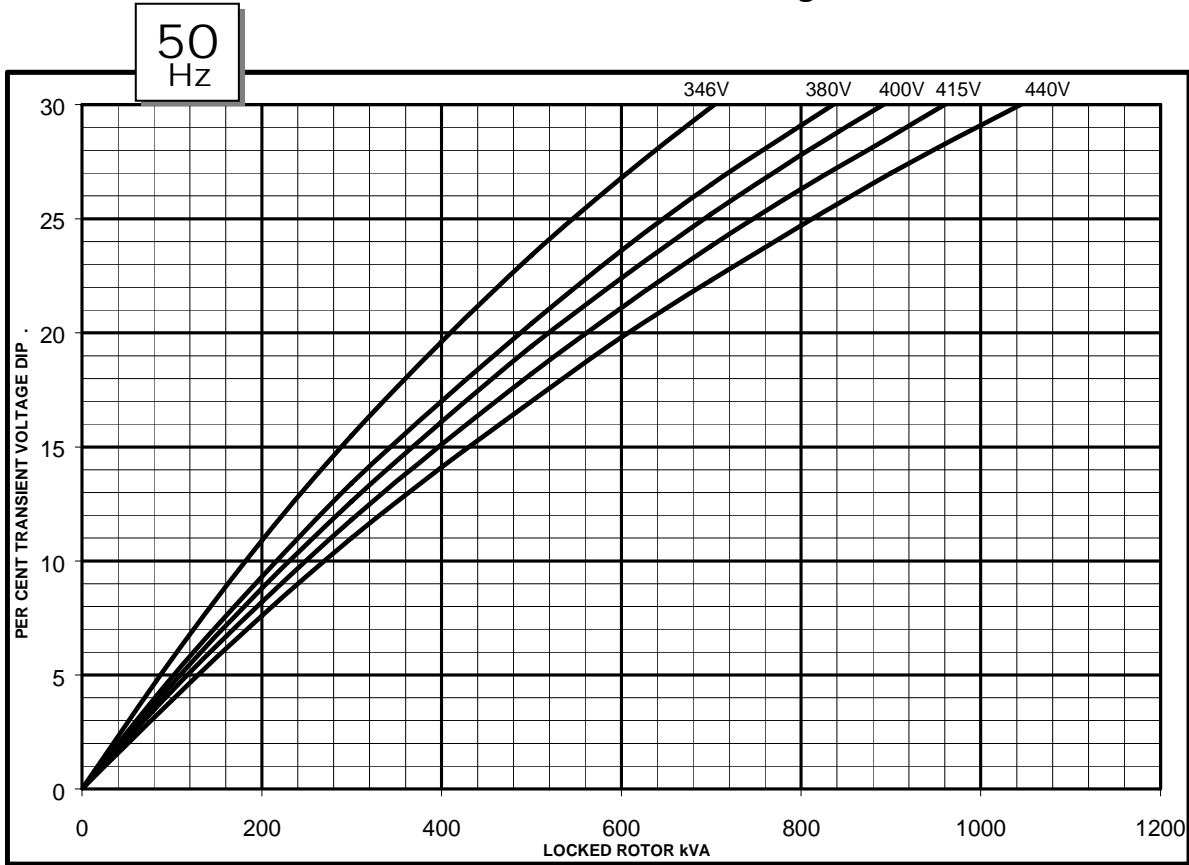


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

50
Hz

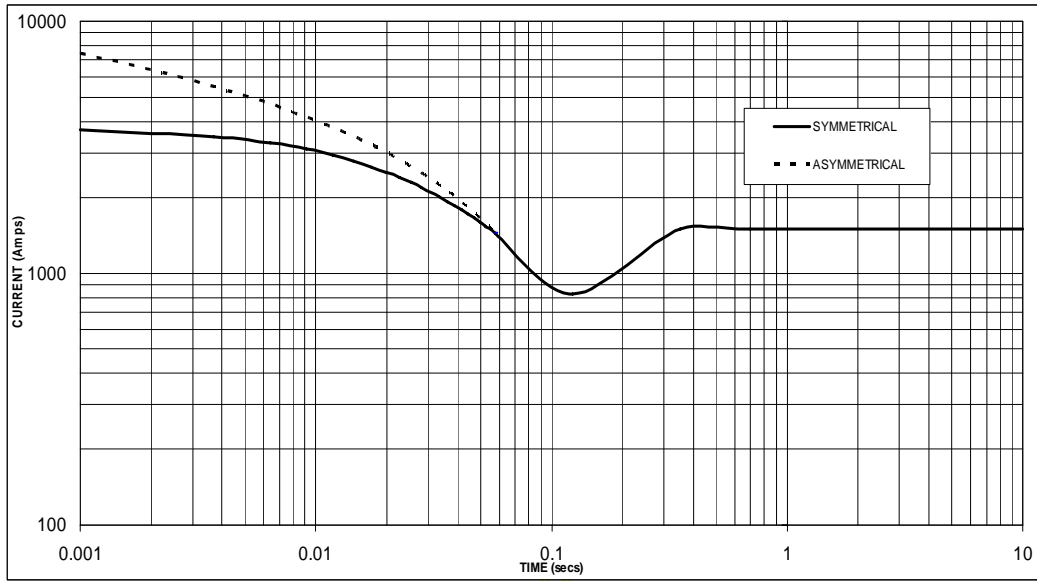

Sustained Short Circuit = 1,500 Amps

60
Hz

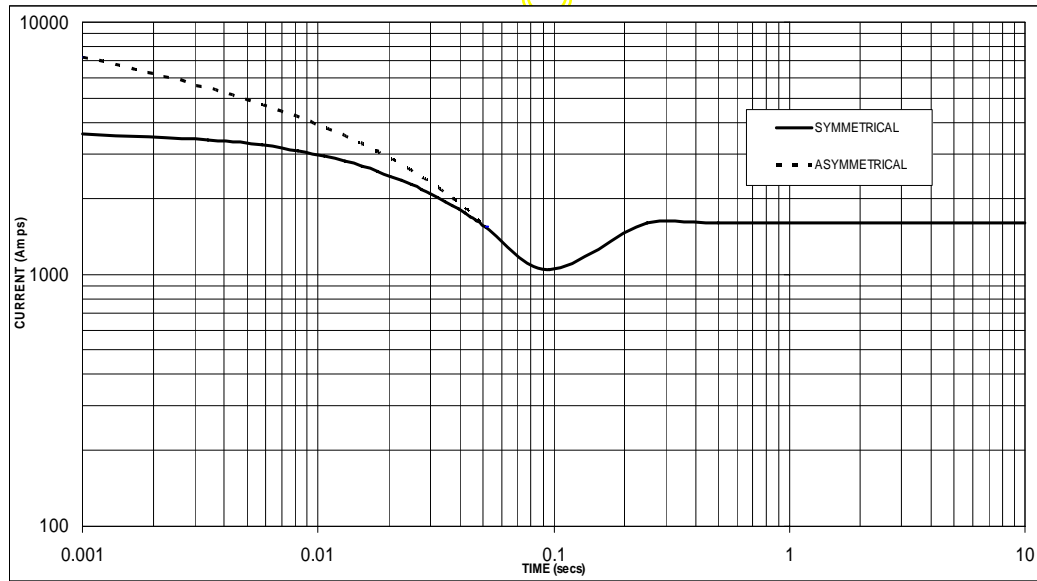

Sustained Short Circuit = 1,600 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.06
415v	X 1.10	460v	X 1.10
440v	X 1.16	480v	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732


HCM434E
Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise	Cont. E - 65/50°C				Cont. B - 70/50°C				Cont. F - 90/50°C				Cont. H - 110/50°C				
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
kVA	230	230	230	230	240	240	240	240	275	275	275	275	295	295	295	295	
kW	184	184	184	184	192	192	192	192	220	220	220	220	236	236	236	236	
Efficiency (%)	94.5	94.5	94.6	94.5	94.4	94.5	94.5	94.5	94.2	94.3	94.4	94.4	93.9	94.1	94.2	94.3	
kW Input	195	195	195	195	203	203	203	203	234	233	233	233	251	251	251	250	

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
kVA	265	275	285	290	275	285	295	305	315	325	340	345	340	350	365	370	
kW	212	220	228	232	220	228	236	244	252	260	272	276	272	280	292	296	
Efficiency (%)	94.4	94.5	94.5	94.6	94.4	94.5	94.5	94.5	94.2	94.3	94.3	94.4	94.0	94.1	94.2	94.2	
kW Input	225	233	241	245	233	241	250	258	268	276	288	292	289	298	310	314	

DIMENSIONS

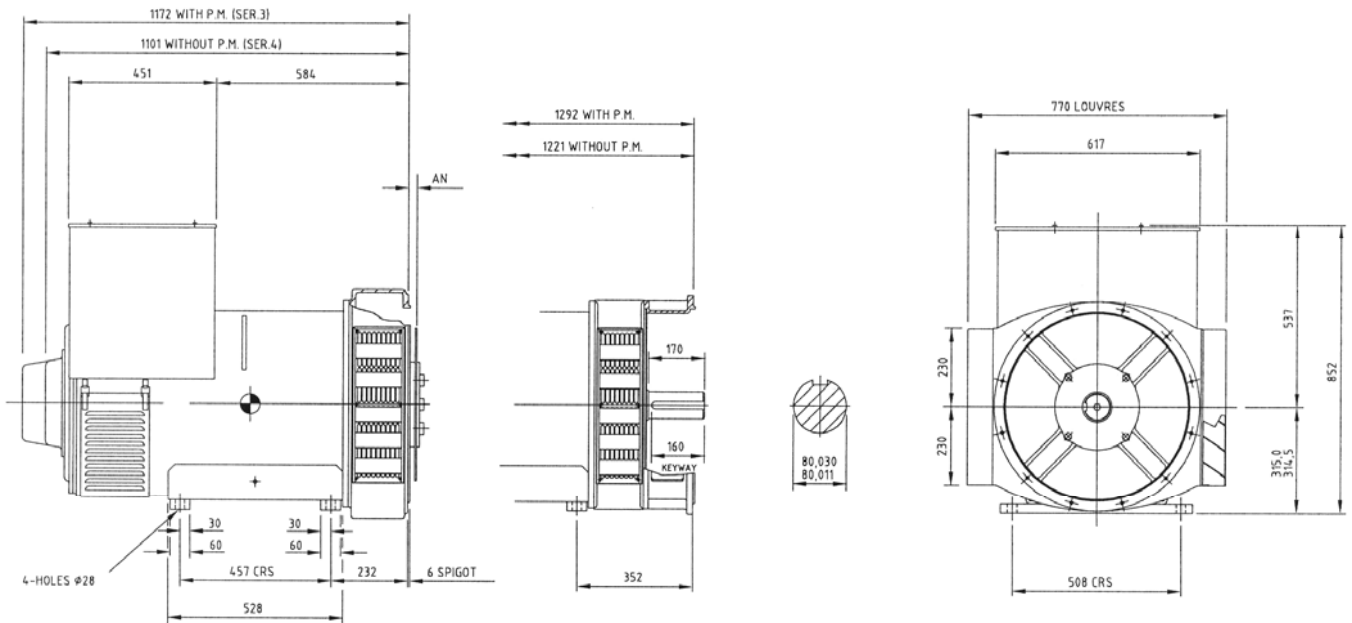

COUPLING DISC	AN
SAE 11,5	39,68
SAE 14	25,4
SAE 18	15,87

APPROVED DOCUMENT

STAMFORD

Head Office Address:
Barnack Road, Stamford
Lincolnshire, PE9 2NB
United Kingdom
Tel: +44 (0) 1780 484000
Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.